



SCIENTIFIC OASIS

Journal of Soft Computing
and Decision AnalyticsJournal homepage: www.jsdda-journal.org
ISSN: 3009-3481

A Belief Similarity Measure for Dempster-Shafer Evidence Theory and Application in Decision Making

Zhe Liu^{1,*}¹ School of Computer Sciences, Universiti Sains Malaysia, 11800 Penang, Malaysia

ARTICLE INFO

Article history:

Received 5 November 2023
 Received in revised form 19 March 2024
 Accepted 10 May 2024
 Available online 23 May 2024

Keywords:

Dempster-Shafer evidence theory
 Belief similarity measure
 Belief entropy
 Decision making

ABSTRACT

How to effectively deal with uncertain and imprecise information in decision making is a complex task. Dempster-Shafer evidence theory (DSET) is widely used for handling such challenges due to its ability to model uncertainty and imprecision. However, Dempster's rule can sometimes yield counterintuitive results when dealing with highly conflicting evidence. In this paper, we introduce a novel belief sine similarity measure, called BS^2M , which effectively measures the discrepancy between different pieces of evidence. We also establish that BS^2M possesses important properties such as boundedness, symmetry, and non-degeneracy. Building upon BS^2M , we present a new method for decision making. The proposed method considers both the credibility and the information volume of each evidence, providing a more comprehensive reflection of their importance. To validate our method, we conduct experiment in target recognition application, demonstrating the effectiveness and rationality of the proposed method.

1. Introduction

How to deal with uncertain and imprecise information in decision making has emerged as a prominent and important topic, which has gained much attention [1-3]. At present, to solve this problem, a plenty of theories have developed, including fuzzy set theory [4-6], neutrosophic set theory [7,8], intuitionistic fuzzy set [9,10], fermatean fuzzy set [11,12], N-soft [13,14], Dempster-Shafer evidence theory [15-17], rough set theory [18,19].

Among them, Dempster-Shafer evidence theory (DSET) [20], as a powerful tool for modeling uncertain and imprecise information, which has been successfully applied in pattern recognition [21-23], fault diagnosis [24,25], information fusion [26,27] and image analysis [28,29]. DSET provides

* Corresponding author.

E-mail address: liuzhe921@gmail.com

<https://doi.org/10.31181/jsdda21202443>

a richer representation of uncertainty by allowing belief values to be assigned to sets of propositions, rather than just individual events [15]. This granularity has made DSET particularly attractive for complex decision-making tasks, offering a more comprehensive understanding of uncertainty and imprecision. Additionally, DST allows for the combination of the evidences using Dempster's rule, which abides by the associative and commutative laws and is especially useful for multisource data fusion [30].

In certain situations, however, Dempster's rule may produce counterintuitive or unacceptable results, especially when combining highly conflicting evidence [31]. To avoid this flaw, some strategies to avoid or mitigate the counterintuitive behaviors have been presented, mainly divide into two types: One is to modify Dempster's rule, including the Yager's rule [32], Dubois and Prade's rule [33] and Smets's rule [34]. These modified rules provide alternative ways to combine evidence and can sometimes yield more intuitive results than Dempster's rule. Nevertheless, they often break the associative and commutative laws of Dempster's rule and are therefore sometimes limited in application scenarios.

The other is to modify the evidence sources, a lot of studies tend to pre-process the evidence before using Dempster's rule [35-38]. For instance, Murphy's average fusion rule [37], advocates for the computation of the average belief values across various evidences to formulate a new evidence. However, this method often overlooks the varying significance of distinct evidences in practical applications, rendering the equal treatment of each evidence in the fusion process somewhat unjustified. To address this shortcoming, Deng et al. [39] enhanced Murphy's method by integrating the Jousselme distance to quantify the similarity amongst diverse evidences. Building upon this, Jiang et al. [40] introduced an evidential correlation coefficient, aiming to account for the conflicts arising between evidences. Xiao [41] proposed a belief Jensen-Shannon divergence to measure the discrepancy between the evidences and employed belief entropy to calculate the uncertainty of the evidence itself. Recently, Kaur and Srivastava [42] introduced a new divergence to consider the discrepancy between the evidences. Regrettably, these methods overlook the internal variations within propositions, indiscriminately equating multiple propositions with their singleton counterparts. Therefore, how to effectively measure the discrepancy between the pieces of evidence is still a challenging issue.

In this paper, we present a belief similarity measure based on the sine function, called BS^2M , to manage the discrepancy between the evidences in DSET. The BS^2M takes into account the number of possible propositions, which makes them more suitable for the similarity measure between evidences. Moreover, we display that BS^2M has some interesting properties. Finally, we devise a decision making method under DSET. The main contributions are concluded as follows:

- Two new BS^2M is introduced based on the sine function to consider the similarities between the evidences.
- The proposed BS^2M shows several advantageous properties, such as boundedness, symmetry, and non-degeneracy, which make them attractive and powerful solutions for evaluating discrepancies.
- A novel decision making method is developed, utilizing the proposed measure and belief entropy.
- The effectiveness of the proposed decision making method is validated through its application.

The remaining sections of this paper are organized as follows. Section 2 offers a brief introduction to the DSET. In Section 3, two new belief sine similarity measures are proposed. Section 4 presents a decision making method, which is based on the proposed measures and belief entropy. The effectiveness of the proposed method is tested by one application in Section 5. Finally, Section 6 concludes the paper.

2. Preliminaries

Definition 1 (Framework of discernment) Suppose Θ be a set of mutually exclusive and exhaustive elements, which is called the framework of discernment (FOD) and denoted by:

$$\Theta = \{\mathcal{X}_1, \mathcal{X}_2, \dots, \mathcal{X}_N\} \quad (1)$$

In DSET, the power-set of Θ is depicted as 2^Θ :

$$2^\Theta = \{\emptyset, \{\mathcal{X}_1\}, \{\mathcal{X}_2\}, \dots, \{\mathcal{X}_N\}, \{\mathcal{X}_1, \mathcal{X}_2\}, \dots, \Theta\} \quad (2)$$

where $\{\mathcal{X}_i\}$ and $\{\mathcal{X}_i, \mathcal{X}_j\}$ are the singleton and multiple propositions, $\emptyset$ is an empty set.

Definition 2 (Basic belief assignment) In the FOD Θ , a basic belief assignment (BBA) $\mathbf{m}$, also called mass function, is a mapping from 2^Θ to $[0, 1]$, which satisfies:

$$\begin{cases} \sum_{\mathcal{X}_i \subseteq \Theta} m(\mathcal{X}_i) = 1 \\ m(\emptyset) = 0 \end{cases} \quad (3)$$

where $m(\mathcal{X}_i)$ denotes the belief value to $\{\mathcal{X}_i\}$.

Definition 3 (Dempster's rule) Let $\mathbf{m}_1$ and $\mathbf{m}_2$ be two independent BBAs on Θ , Dempster's rule is described as:

$$m(\mathcal{X}_i) = \begin{cases} 0, & \mathcal{X}_i = \emptyset \\ \frac{\sum_{\mathcal{X}_j \cap \mathcal{X}_k = \mathcal{X}_i} m_1(\mathcal{X}_j)m_2(\mathcal{X}_k)}{1-K}, & \mathcal{X}_i \neq \emptyset \end{cases} \quad (4)$$

with

$$K = \sum_{\mathcal{X}_j \cap \mathcal{X}_k = \emptyset} m_1(\mathcal{X}_j)m_2(\mathcal{X}_k) \quad (5)$$

where K denotes the conflict coefficient between $\mathbf{m}_1$ and $\mathbf{m}_2$.

Definition 4 (Deng entropy) Deng [43] proposed the concept of Deng entropy, which is defined as follows:

$$E_d(\mathbf{m}) = - \sum_{\mathcal{X}_i \subseteq \Theta} m(\mathcal{X}_i) \log \frac{m(\mathcal{X}_i)}{2^{|\mathcal{X}_i|} - 1} \quad (6)$$

3. Proposed Belief Similarity Measure

In DSET, how to effectively measure similarities between the evidences remains an open issue. In this section, a new belief similarity measures is suggested to handle the above question. Moreover, several properties of the proposed belief similarity measure are explored.

Definition 5 (Belief sine similarity measure) Let $\mathbf{m}_1$ and $\mathbf{m}_2$ are two BBAs on Ω , the belief sine similarity measure (BS^2M) between $\mathbf{m}_1$ and $\mathbf{m}_2$ is defined as:

$$BS^2M(\mathbf{m}_1, \mathbf{m}_2) = 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right) \quad (7)$$

where the term $2^{|\mathcal{X}_i|} - 1$ considers all the number of possible propositions, thereby incorporating the scale of the FOD's impact. Compared with the previous works such as [1,41,42], BS^2M can reasonably calculate similarities between two BBAs and avoid the negative impact of ignoring multiple propositions.

Theorem 1 The proposed BS^2M satisfies the following properties:

1. Symmetry: $BS^2M(\mathbf{m}_1, \mathbf{m}_2) = BS^2M(\mathbf{m}_2, \mathbf{m}_1)$.
2. Bounded: $0 \leq BS^2M(\mathbf{m}_1, \mathbf{m}_2) \leq 1$.
3. Non-degeneracy: $BS^2M(\mathbf{m}_1, \mathbf{m}_2) = 1$ if and only if $\mathbf{m}_1 = \mathbf{m}_2$.

Proof 1 For two BBAs $\mathbf{m}_1$ and $\mathbf{m}_2$ on Ω , we have:

$$BS^2M(\mathbf{m}_1, \mathbf{m}_2) = 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right)$$

Clearly, we can get the following:

$$0 \leq \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \leq 2$$

and

$$0 \leq \frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \leq \frac{\pi}{2}$$

For $\sin(x)$, $x \in [0, \frac{\pi}{2}]$, its range is always positive and within $[0, 1]$. Hence, we have $0 \leq BS^2M(\mathbf{m}_1, \mathbf{m}_2) \leq 1$.

Proof 2 For two arbitrary BBAs $\mathbf{m}_1$ and $\mathbf{m}_2$ in Ω , we have:

$$BS^2M(\mathbf{m}_1, \mathbf{m}_2) = 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right)$$

$$BS^2M(\mathbf{m}_2, \mathbf{m}_1) = 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_2(\mathcal{X}_i) - m_1(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right)$$

We can easily obtain $BS^2M(\mathbf{m}_1, \mathbf{m}_2) = BS^2M(\mathbf{m}_2, \mathbf{m}_1)$.

Proof 3 For two same BBAs $\mathbf{m}_1$ and $\mathbf{m}_2$ in Ω , we have:

$$\begin{aligned} BS^2M(\mathbf{m}_1, \mathbf{m}_2) &= 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right) \\ &= 1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_1(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right) \\ &= 1 \end{aligned}$$

Contrariwise, assume that $BS^2M(\mathbf{m}_1, \mathbf{m}_2) = 1$, we thus have:

$$1 - \sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right) = 1$$

and

$$\sin \left(\frac{\pi}{4} \sum_{\mathcal{X}_i \subseteq \Omega} \frac{|m_1(\mathcal{X}_i) - m_2(\mathcal{X}_i)|}{2^{|\mathcal{X}_i|} - 1} \right) = 0$$

We can easily conclude $\mathbf{m}_1 = \mathbf{m}_2$. Hence, we can prove the property of non-degeneracy.

Here, several examples are used to illustrate the properties of BS^2M .

Example 1 Let m_1 and m_2 be two BBAs in $\Theta = \{\mathcal{X}_1, \mathcal{X}_2, \mathcal{X}_3\}$.

$$\begin{aligned} m_1 : m_1(\{\mathcal{X}_1\}) &= \alpha, & m_1(\{\mathcal{X}_2\}) &= \beta, & m_1(\{\mathcal{X}_3\}) &= 1 - \alpha - \beta \\ m_2 : m_2(\{\mathcal{X}_1\}) &= 0.5, & m_2(\{\mathcal{X}_2\}) &= 0.5 \end{aligned}$$

where $0 \leq \alpha, \beta \leq 1$, and $0 \leq \alpha + \beta \leq 1$.

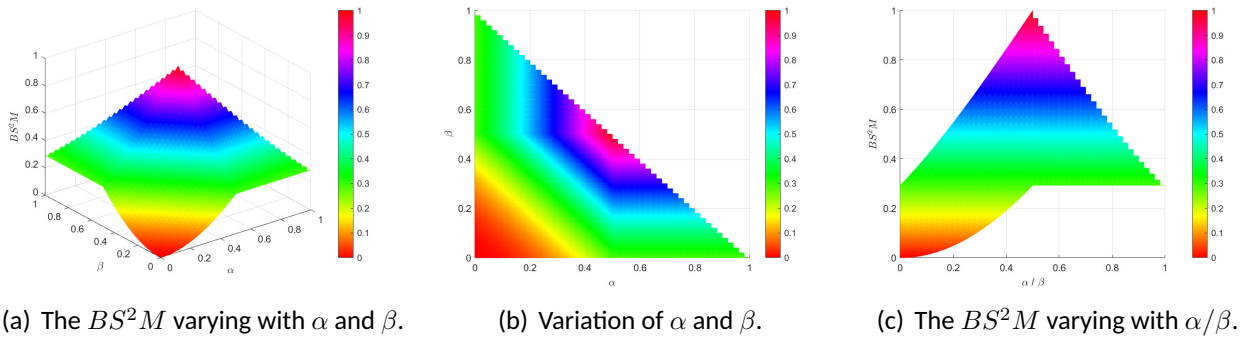


Figure 1: The results of BS^2M varying with α and β in Example 1.

As shown in Figure 1, when $\alpha = 0.5$ and $\beta = 0.5$, we have $m_1(\{\mathcal{X}_1\}) = 0.5$, $m_1(\{\mathcal{X}_2\}) = 0.5$, so $\mathbf{m}_1 = \mathbf{m}_2$, BS^2M has the maximum belief values of 1. When $\alpha = 0$ and $\beta = 0$, we have $m_1(\{\mathcal{X}_1\}) = 0$, $m_1(\{\mathcal{X}_2\}) = 0$, $m_1(\{\mathcal{X}_3\}) = 1$, in which case $\mathbf{m}_1$ and $\mathbf{m}_2$ are in complete conflict, BS^2M gets the minimum belief values of 0. Furthermore, BS^2M always ranges between $[0, 1]$ regardless of how α and β change. Besides, we can also observe that $BS^2M(\mathbf{m}_1, \mathbf{m}_2) = BS^2M(\mathbf{m}_2, \mathbf{m}_1)$. Hence, this example shows the properties of symmetry, bounded and non-degeneracy.

Example 2 Suppose that $\mathbf{m}_1$ and $\mathbf{m}_2$ are two BBAs in $\Theta = \{\mathcal{X}_1, \mathcal{X}_2, \dots, \mathcal{X}_{10}\}$.

$$\begin{aligned} \mathbf{m}_1 : m_1(\{\mathcal{X}_2\}) &= \alpha, & m_1(\Phi_x) &= 1 - \alpha \\ \mathbf{m}_2 : m_2(\{\mathcal{X}_2\}) &= 0.8, & m_2(\Phi_x) &= 0.2 \end{aligned}$$

where $0 \leq \alpha \leq 1$, and Φ_x denotes the set of element, range from $\{\mathcal{X}_1\}$ to $\{\mathcal{X}_1, \mathcal{X}_2, \dots, \mathcal{X}_{10}\}$.

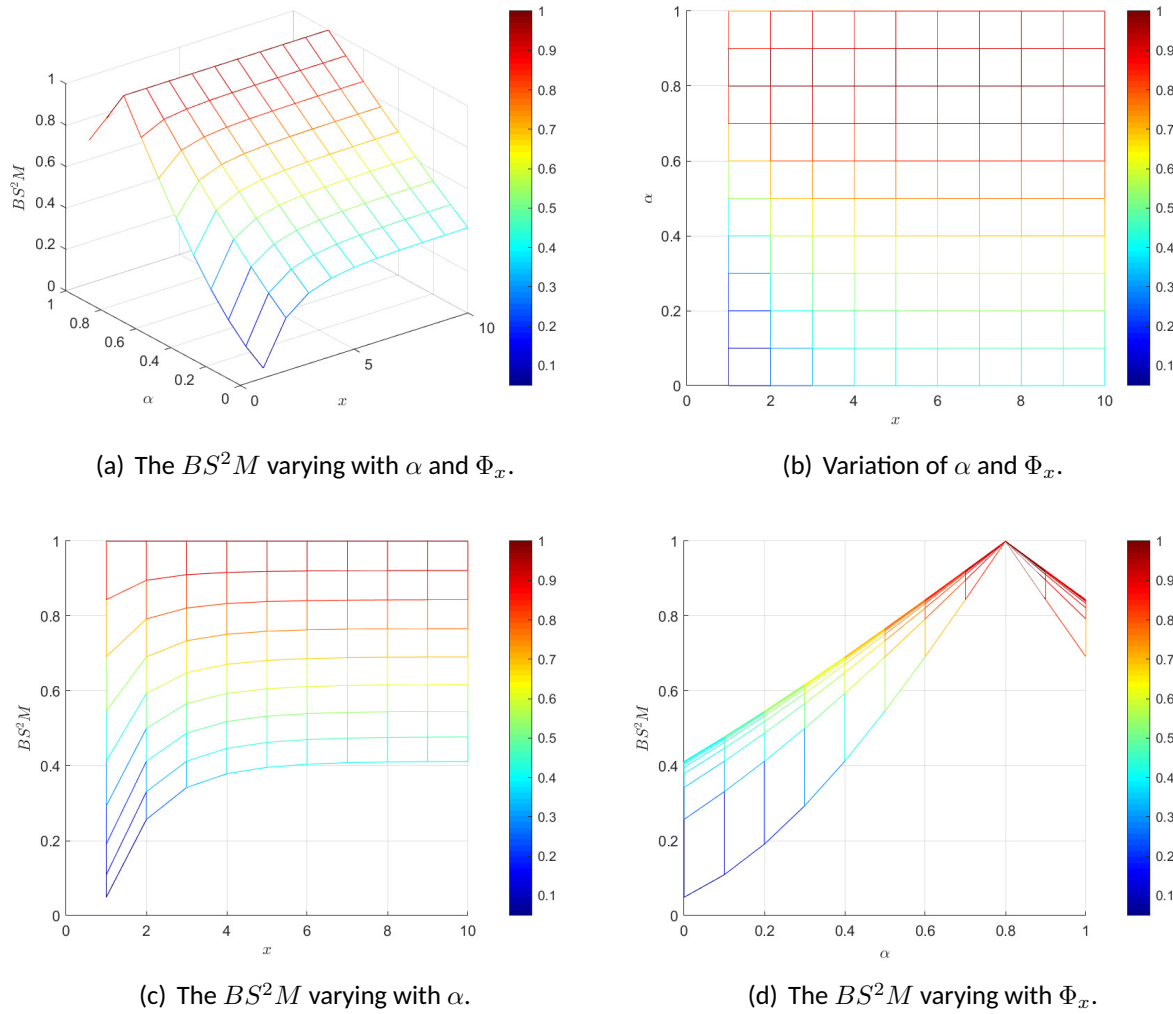


Figure 2: The results of BS^2M varying with α and Φ_x in Example 2.

As shown in Figure 2, when $\alpha = 0.8$, we obtain $\mathbf{m}_1 = \mathbf{m}_2$, and BS^2M obtains the maximum belief values of 1. Besides, BS^2M always ranges between $[0, 1]$ regardless of how α and Φ_x change. Example 1 and Example 2 demonstrate that BS^2M can effectively measure the similarity between different propositions of BBAs.

4. Proposed decision making method

In this section, we introduce an advanced decision making method, leveraging the belief sine similarity measure and belief entropy, tailored to optimally merge highly conflicting evidence. Our method uniquely incorporates both credibility and the volume of information, ensuring a more nuanced evaluation of each evidence's significance. Initially, we employ BS^2m to determine the credibility weight for each evidence. Subsequently, belief entropy is harnessed to ascertain the weight linked to the information volume of each evidence. Conclusively, comprehensive weights guide the creation of weighted average evidence, with the final fusion outcome derived using Dempster's rule.

Let us consider p independent evidences $\mathbf{m}_k (k = 1, \dots, p)$ on $\Theta = \{\mathcal{X}_1, \dots, \mathcal{X}_N\}$.

Step 1: Calculate the similarity between $\mathbf{m}_k (k = 1, \dots, p)$ and $\mathbf{m}_l (l = 1, \dots, p)$, denoted as $BS^2M(\mathbf{m}_k, \mathbf{m}_l)$, by using Eq. (7). The similarity matrix $SM_{p \times p}$ is constructed as:

$$SM_{p \times p} = \begin{bmatrix} 1 & BS^2M(\mathbf{m}_1, \mathbf{m}_2) & \dots & BS^2M(\mathbf{m}_1, \mathbf{m}_p) \\ BS^2M(\mathbf{m}_2, \mathbf{m}_1) & 1 & \dots & BS^2M(\mathbf{m}_2, \mathbf{m}_p) \\ \vdots & \ddots & \ddots & \vdots \\ BS^2M(\mathbf{m}_p, \mathbf{m}_1) & BS^2M(\mathbf{m}_p, \mathbf{m}_2) & \dots & 1 \end{bmatrix} \quad (8)$$

Step 2: Calculate the support degree $S(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$S(\mathbf{m}_k) = \sum_{l=1, l \neq k}^p BS^2M(\mathbf{m}_k, \mathbf{m}_l) \quad (9)$$

Step 3: Obtain the credibility weight $W_C(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$W_C(\mathbf{m}_k) = \frac{S(\mathbf{m}_k)}{\sum_{k=1}^p S(\mathbf{m}_k)} \quad (10)$$

Step 4: Calculate the belief entropy $E_d(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$E_d(\mathbf{m}_k) = - \sum_{\mathcal{X}_i \subseteq \Theta} m_k(\mathcal{X}_i) \log \frac{m_k(\mathcal{X}_i)}{2^{|\mathcal{X}_i|} - 1} \quad (11)$$

Step 5: Compute the information volume $IV(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$IV(\mathbf{m}_k) = \exp(E_d(\mathbf{m}_k)), \forall k = 1, \dots, p \quad (12)$$

Step 6: Obtain the information volume weight $W_{IV}(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$W_{IV}(\mathbf{m}_k) = \frac{IV(\mathbf{m}_k)}{\sum_{k=1}^p IV(\mathbf{m}_k)} \quad (13)$$

Step 7: Obtain the comprehensive weight $W(\mathbf{m}_k)$ of $\mathbf{m}_k$ as:

$$W(\mathbf{m}_k) = \frac{W_C(\mathbf{m}_k) \times W_{IV}(\mathbf{m}_k)}{\sum_{k=1}^n W_C(\mathbf{m}_k) \times W_{IV}(\mathbf{m}_k)} \quad (14)$$

Step 8: Generate the weighted average evidence $\bar{\mathbf{m}}$ as:

$$\bar{m}(\mathcal{X}_i) = \sum_{k=1}^n W(\mathbf{m}_k) \times m_k(\mathcal{X}_i) \quad (15)$$

Step 9: Utilize Eq. (4) to fuse $\bar{\mathbf{m}}$ $n - 1$ times.

5. Application

To validate the effectiveness of the proposed method against other competitive techniques, we employed a target recognition application focusing on aircraft types, as delineated in [44]. In this scenario, five radar sensors (S_1, S_2, S_3, S_4 and S_5) gather data, which is subsequently represented as basic belief assignments (BBAs). The potential aircraft types under consideration are the airliner $\{\mathcal{X}_1\}$, bomber $\{\mathcal{X}_2\}$ and fighter $\{\mathcal{X}_3\}$, constituting the framework of discernment $\Theta = \{\mathcal{X}_1, \mathcal{X}_2, \mathcal{X}_3\}$. The BBAs derived from each sensor's data are articulated in Table 1. Notably, all BBAs align with target $\{\mathcal{X}_1\}$ with the exception of m_2 . Given its stark deviation from the consensus, m_2 is deemed an unreliable evidence due to its heightened conflict with the remaining evidences.

Table 1: BBAs modeled from sensors in target recognition

BBAs	$\{\mathcal{X}_1\}$	$\{\mathcal{X}_2\}$	$\{\mathcal{X}_3\}$	Θ
$S_1: m_1(\cdot)$	0.40	0.60	0.00	0.00
$S_2: m_2(\cdot)$	0.00	0.70	0.30	0.00
$S_3: m_3(\cdot)$	0.85	0.00	0.00	0.15
$S_4: m_4(\cdot)$	0.40	0.60	0.00	0.00
$S_5: m_5(\cdot)$	0.75	0.00	0.00	0.25

The results of different methods are detailed in Table 2. Notably, Dempster's rule exclusively favors target $\{\mathcal{X}_2\}$, highlighting its inherent difficulty in managing evidence with significant conflict. In contrast, the proposed method successfully discerns target $\{\mathcal{X}_1\}$, aligning seamlessly with the findings from various alternative methods. Additionally, Table 2 displays how the results shift with an increasing amount of evidence. Dempster's rule persistently endorses $\{\mathcal{X}_2\}$ incorrectly, whereas the belief value for $\{\mathcal{X}_1\}$ progressively ascends when applying other methods. Among them, the proposed method yields the most substantial belief value, peaking at 0.8866 for $\{\mathcal{X}_1\}$, underscoring its practical applicability and efficacy.

6. Conclusion

This paper proposes a new belief similarity measure for capturing conflicts between evidences based on DSET. The proposed measure can reasonably distinguish the effects of singleton and multiple propositions, and satisfy desirable properties. Moreover, a decision making method is developed based on the proposed measure and belief entropy, offering an effective approach for resolving conflicts and facilitating decision-making processes. Numerical examples and application results verify the efficiency and potential of the proposed method in decision-making. In future studies, we plan to extend the application of the proposed method to other domains that involve uncertainty and imprecision, such as risk analysis and medical diagnosis.

Acknowledgement

This research was not funded by any grant.

Conflicts of Interest

The author declares no conflicts of interest.

Table 2: Fusion results of different methods in pattern classification

Methods	Focal element	$m_{1,2}$	$m_{1,2,3}$	$m_{1,2,3,4}$	$m_{1,2,3,4,5}$
Dempster's rule [20]	$\{X_1\}$	0.0000	0.0000	0.0000	0.0000
	$\{X_2\}$	1.0000	1.0000	1.0000	1.0000
	$\{X_3\}$	0.0000	0.0000	0.0000	0.0000
	Θ	0.0000	0.0000	0.0000	0.0000
Murphy's method [37]	$\{X_1\}$	0.0825	0.4663	0.6263	0.7273
	$\{X_2\}$	0.8711	0.5182	0.6263	0.2720
	$\{X_3\}$	0.0464	0.0149	0.0014	0.0007
	Θ	0.0000	0.0000	0.0000	0.0000
Deng et al.'s method [39]	$\{X_1\}$	0.0825	0.3501	0.2440	0.7261
	$\{X_2\}$	0.8711	0.6389	0.7554	0.2736
	$\{X_3\}$	0.0464	0.0108	0.0006	0.0003
	Θ	0.0000	0.0000	0.0000	0.0000
Lin et al.'s method [1]	$\{X_1\}$	0.0825	0.3991	0.2805	0.6901
	$\{X_2\}$	0.8711	0.5905	0.7190	0.3096
	$\{X_3\}$	0.0464	0.0101	0.0006	0.0003
	Θ	0.0000	0.0000	0.0000	0.0000
Jiang's method [40]	$\{X_1\}$	0.0825	0.3405	0.2499	0.7328
	$\{X_2\}$	0.8711	0.6512	0.7496	0.2669
	$\{X_3\}$	0.0464	0.0081	0.0005	0.0002
	Θ	0.0000	0.0002	0.0000	0.0000
Xiao's method [41]	$\{X_1\}$	0.0825	0.4404	0.2887	0.8393
	$\{X_2\}$	0.8673	0.5526	0.7111	0.1605
	$\{X_3\}$	0.0424	0.0067	0.0002	0.0002
	Θ	0.0000	0.0003	0.0000	0.0001
Gao and Xiao's method [36]	$\{X_1\}$	0.0903	0.4509	0.2991	0.8504
	$\{X_2\}$	0.8673	0.5421	0.7007	0.1494
	$\{X_3\}$	0.0424	0.0066	0.0002	0.0002
	Θ	0.0000	0.0004	0.0000	0.0001
Proposed method	$\{X_1\}$	0.0903	0.3072	0.2110	0.8866
	$\{X_2\}$	0.8673	0.6855	0.7889	0.1131
	$\{X_3\}$	0.0424	0.0072	0.0002	0.0002
	Θ	0.0000	0.0001	0.0000	0.0001

References

- [1] Lin, Y., Li, Y., Yin, X., & Dou, Z. (2018). Multisensor fault diagnosis modeling based on the evidence theory. *IEEE Transactions on Reliability*, 67(2), 513–521. <https://doi.org/10.1109/TR.2018.2800014>.
- [2] Liu, Z., Cao, Y., Yang, X., & Liu, L. (2023). A new uncertainty measure via belief Rényi entropy in Dempster-Shafer theory and its application to decision making. *Communications in Statistics-Theory and Methods*, <https://doi.org/10.1080/03610926.2023.2253342>.
- [3] Liu, Z., Deveci, M., Pamucar, D., & Pedrycz, W. (2024). An effective multi-source data fusion approach based on α -divergence in belief functions theory with applications to air target recognition and fault diagnosis. *Information Fusion*, 110, 102458. <https://doi.org/10.1016/j.inffus.2024.102458>.
- [4] Farooq, D. (2024). Application of pythagorean fuzzy analytic hierarchy process for assessing driver behavior criteria associated to road safety. *Journal of Soft Computing and Decision Analytics*,

2(1), 144-158. <https://doi.org/10.31181/jscda21202439>.

[5] Liu, Z. (2024d). Hellinger distance measures on pythagorean fuzzy environment via their applications. *International Journal of Knowledge-based and Intelligent Engineering Systems*, <https://doi.org/10.3233/KES-230150>.

[6] Liu, Z., & Letchmunan, S. (2024a). Enhanced fuzzy clustering for incomplete instance with evidence combination. *ACM Transactions on Knowledge Discovery from Data*, 18(3), 1-20. <https://doi.org/10.1145/3638061>.

[7] Qiu, H., Liu, Z., & Letchmunan, S. (2024). Incm: Neutrosophic c-means clustering algorithm for interval-valued data. *Granular Computing*, 9(2), 34. <https://doi.org/10.1007/s41066-024-00452-y>.

[8] Liu, Z., Qiu, H., & Letchmunan, S. (2024). Self-adaptive attribute weighted neutrosophic c-means clustering for biomedical applications. *Alexandria Engineering Journal*, 96, 42-57. <https://doi.org/10.1016/j.aej.2024.03.092>.

[9] Dagistanli, H. A. (2024). An interval-valued intuitionistic fuzzy vikor approach for r&d project selection in defense industry investment decisions. *Journal of Soft Computing and Decision Analytics*, 2(1), 1-13. <https://doi.org/10.31181/jscda21202428>.

[10] Li, X., Liu, Z., Han, X., Liu, N., & Yuan, W. (2023). An intuitionistic fuzzy version of hellinger distance measure and its application to decision-making process. *Symmetry*, 15(2), 500. <https://doi.org/10.3390/sym15020500>.

[11] Liu, Z. (2024). A distance measure of fermatean fuzzy sets based on triangular divergence and its application in medical diagnosis. *Journal of Operations Intelligence*, 2(1), 167-178. <https://doi.org/10.31181/jopi21202415>.

[12] Liu, Z. (2024). Fermatean fuzzy similarity measures based on tanimoto and sørensen coefficients with applications to pattern classification, medical diagnosis and clustering analysis. *Engineering Applications of Artificial Intelligence*, 132, 107878. <https://doi.org/10.1016/j.engappai.2024.107878>.

[13] Alcantud, J. C. R., Feng, F., & Yager, R. R. (2020). An N-soft set approach to rough sets. *IEEE Transactions on Fuzzy Systems*, 28(11), 2996-3007. <https://doi.org/10.1109/TFUZZ.2019.2946526>.

[14] Liu, J., Chen, Z., Chen, Y., Zhang, Y., & Li, C. (2021). Multiattribute group decision making based on interval-valued neutrosophic n-soft sets. *Granular Computing*, 6, 1009-1023. <https://doi.org/10.1007/s41066-020-00244-0>.

[15] Liu, Z. (2023). An effective conflict management method based on belief similarity measure and entropy for multi-sensor data fusion. *Artificial Intelligence Review*, 15495-15522. <https://doi.org/10.1007/s10462-023-10533-0>.

[16] Liu, Z. (2024). An evidential sine similarity measure for multisensor data fusion with its applications. *Granular Computing*, 9(1), 4. <https://doi.org/10.1007/s41066-023-00426-6>.

[17] Liu, Z., & Letchmunan, S. (2024). Representing uncertainty and imprecision in machine learning: A survey on belief functions. *Journal of King Saud University-Computer and Information Sciences*, 101904. <https://doi.org/10.1016/j.jksuci.2023.101904>.

[18] Aggarwal, M. (2017). Rough information set and its applications in decision making. *IEEE Transactions on Fuzzy Systems*, 25(2), 265-276. <https://doi.org/10.1109/TFUZZ.2017.2670551>.

[19] Cheng, Y., Zhao, F., Zhang, Q., & Wang, G. (2021). A survey on granular computing and its uncertainty measure from the perspective of rough set theory. *Granular Computing*, 6, 3-17. <https://doi.org/10.1007/s41066-019-00204-3>.

[20] Dempster, A. (1967). Upper and lower probabilities induced by a multivalued mapping. *Ann. Math. Stat.*, 325-339. <https://doi.org/10.1214/aoms/1177698950>.

[21] Liu, Z. (2023). Credal-based fuzzy number data clustering. *Granular Computing*, 8(6), 1907-1924. <https://doi.org/10.1007/s41066-023-00410-0>.

- [22] Liu, Z., Huang, H., Letchmunan, S., & Deveci, M. (2024). Adaptive weighted multi-view evidential clustering with feature preference. *Knowledge-Based Systems*, 294, 111770. <https://doi.org/10.1016/j.knsys.2024.111770>.
- [23] Ma, Z., Liu, Z., Luo, C., & Song, L. (2021). Evidential classification of incomplete instance based on k-nearest centroid neighbor. *Journal of Intelligent & Fuzzy Systems*, 41(6), 7101-7115. <https://doi.org/10.3233/JIFS-210991>.
- [24] Zhang, H., & Deng, Y. (2020). Weighted belief function of sensor data fusion in engine fault diagnosis. *Soft Computing*, 24(3), 2329-2339. <https://doi.org/10.1007/s00500-019-04063-7>.
- [25] Zhang, L., & Xiao, F. (2022). A novel belief χ^2 divergence for multisource information fusion and its application in pattern classification. *International Journal of Intelligent Systems*, 37(10), 7968-7991. <https://doi.org/10.1002/int.22912>.
- [26] Huang, H., Liu, Z., Han, X., Yang, X., & Liu, L. (2023). A belief logarithmic similarity measure based on dempster-shafer theory and its application in multi-source data fusion. *Journal of Intelligent & Fuzzy Systems*, 45(3), 4935-4947. <https://doi.org/10.3233/JIFS-230207>.
- [27] Lyu, S., & Liu, Z. (2024). A belief sharma-mittal divergence with its application in multi-sensor information fusion. *Computational and Applied Mathematics*, 43(1), 1-31. <https://doi.org/10.1007/s40314-023-02542-0>.
- [28] Derraz, F., Pinti, A., Peyrodie, L., Bousahla, M., & Toumi, H. (2015). Joint variational segmentation of ct/pet data using non-local active contours and belief functions. *Pattern Recognition and Image Analysis*, 25(3), 407-412. <https://doi.org/10.1134/S1054661815030049>.
- [29] Khalaj, F., & Khalaj, M. (2022). Developed cosine similarity measure on belief function theory: An application in medical diagnosis. *Communications in Statistics-Theory and Methods*, 51(9), 2858-2869. <https://doi.org/10.1080/03610926.2020.1782935>.
- [30] Xiao, F. (2023). Gejs: A generalized evidential divergence measure for multisource information fusion. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 53(4), 2246-2258. <https://doi.org/10.1109/TSMC.2022.3211498>.
- [31] Zadeh, L. A. (1986). A simple view of the dempster-shafer theory of evidence and its implication for the rule of combination. *AI Mag.*, 7(2), 85-85. <https://doi.org/10.1609/aimag.v7i2.542>.
- [32] Yager, R. R. (1987). On the Dempster-Shafer framework and new combination rules. *Information Sciences*, 41(2), 93-137. [https://doi.org/10.1016/0020-0255\(87\)90007-7](https://doi.org/10.1016/0020-0255(87)90007-7).
- [33] Dubois, D., & Prade, H. (1988). Representation and combination of uncertainty with belief functions and possibility measures. *Computational Intelligence*, 4(3), 244-264. <https://doi.org/10.1111/j.1467-8640.1988.tb00279.x>.
- [34] Smets, P. (1990). The combination of evidence in the transferable belief model. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 12(5), 447-458. <https://doi.org/10.1109/34.55104>.
- [35] Gao, X., & Xiao, F. (2022). A generalized χ^2 divergence for multisource information fusion and its application in fault diagnosis. *International Journal of Intelligent Systems*, 37(1), 5-29. <https://doi.org/10.1002/int.2261>.
- [36] Gao, X., & Xiao, F. (2022). An improved belief χ^2 divergence for dempster-shafer theory and its applications in pattern recognition. *Computational and Applied Mathematics*, 41(6), 1-22. <https://doi.org/10.1007/s40314-022-01975-3>.
- [37] Murphy, C. K. (2000). Combining belief functions when evidence conflicts. *Decision Support Systems*, 29(1), 1-9. [https://doi.org/10.1016/S0167-9236\(99\)00084-6](https://doi.org/10.1016/S0167-9236(99)00084-6).
- [38] Wang, H., Deng, X., Jiang, W., & Geng, J. (2021). A new belief divergence measure for dempster-shafer theory based on belief and plausibility function and its application in multi-source data fusion. *Engineering Applications of Artificial Intelligence*, 97, 104030. <https://doi.org/10.1016/j.engappai.2020.104030>.

- [39] Deng, Y., Shi, W., Zhu, Z., & Liu, Q. (2004). Combining belief functions based on distance of evidence. *Decision Support Systems*, 38(3), 489-493. <https://doi.org/10.1016/j.dss.2004.04.015>.
- [40] Jiang, W. (2018). A correlation coefficient for belief functions. *International Journal of Approximate Reasoning*, 103, 94-106. <https://doi.org/10.1016/j.ijar.2018.09.001>.
- [41] Xiao, F. (2019). Multi-sensor data fusion based on the belief divergence measure of evidences and the belief entropy. *Information Fusion*, 46, 23-32. <https://doi.org/10.1016/j.inffus.2018.04.003>.
- [42] Kaur, M., & Srivastava, A. (2023). A new divergence measure for belief functions and its applications. *International Journal of General Systems*, 52(4), 455-472. <https://doi.org/10.1080/03081079.2022.2151006>.
- [43] Deng, Y. (2016). Deng entropy. *Chaos, Solitons & Fractals*, 91, 549-553. <https://doi.org/10.1016/j.chaos.2016.07.014>.
- [44] Pan, L., Gao, X., Deng, Y., & Cheong, K. H. (2022). Enhanced mass jensen-shannon divergence for information fusion. *Expert Systems with Applications*, 209, 118065. <https://doi.org/10.1016/j.eswa.2022.118065>.